

250SF/250SFK, 500SF/500SFK

FEATURES

- A 6-mm- ϕ fuse, which is the of the same size as a glass tube fuse, can be used to implement a current breaking capacity of 10kA at 500V
- Able to block off even DC
- UL approved for up to rated 20A (500SF/SFK)
- Space-efficient


RATING

• 250SF/SFK

Rated voltage and breaking capacity : 250V AC-10kA, 250V DC (L/R = 10ms)-10kA
 Minimum breaking current : 250V AC/DC- 4 times the rated amperage
 Maximum arc voltage: 500V

• 500SF/SFK

Rated voltage and breaking capacity : 500V AC-10kA, 500V DC (L/R = 2ms)-10kA
 Minimum breaking current : 500V AC/DC- 4 times the rated amperage
 Maximum arc voltage : 1000V



UL/cUL standard approved rating

Rated voltage and breaking capacity: Same as the standard rating.
 *250SF/SFK are not cUL approved.

CAUTION!

- Read "FOR SAFE USE" and "PROTECT FUSE USER'S GUIDE" at the back of this catalog before use.
- A small fuse may generate a relatively large amount of heat, so a fuse with sufficient capacity is recommended for long, continuous use.

Specifications 250SF/250SFK

500SF/500SFK


Ta=25°C

Type	Rated Amperage (A)	Fusing I ² t (A ² S)	Shutdown I ² t (A ² S) at AC250V 10kA	Power Loss (W)	Weight (g)	Fig	Standard
250SF-4UL	4	4	14	0.6	2.5	SF= Fig 1	
250SFK04UL				0.7			
250SF-6UL	6	11	27	0.9	2.5	SF= Fig 1	
250SFK06UL				1.1			
250SF-10UL	10	25	60	1.6	3.25	SFK= Fig 2	
250SFK10UL				1.7			
250SF-16UL	16	55	120	3.5	3.25	SFK= Fig 2	
250SFK16UL				3.2			
250SF-25	25	220	400	5.0	3.25	SFK= Fig 2	
250SFK25				5.0			


Ta=25°C

Type	Rated Amperage (A)	Fusing I ² t (A ² S)	Shutdown I ² t (A ² S) at AC500V 10kA	Power Loss (W)	Weight (g)	Fig	Standard
500SF-4UL	4	4	29	0.6	2.5	SF= Fig 1	
500SFK04UL				0.7			
500SF-6UL	6	11	50	0.9	2.5	SF= Fig 1	
500SFK06UL				1.1			
500SF-10UL	10	25	110	1.6	3.25	SFK= Fig 2	
500SFK10UL				1.7			
500SF-16UL	16	55	230	3.5	3.25	SFK= Fig 2	
500SFK16UL				3.2			
500SF-20UL	20	155	480	4.0	3.25	SFK= Fig 2	
500SFK20UL				4.3			


Dimensions 250SF, 500SF <Fig.1>

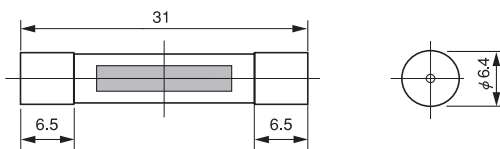


250SFK, 500SFK <Fig.2>

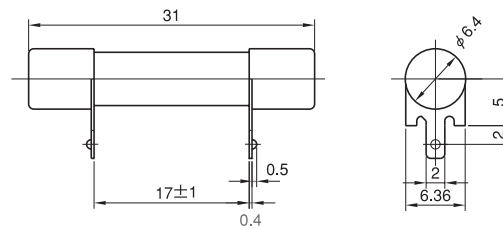


Fusing Characteristics 250SF/250SFK

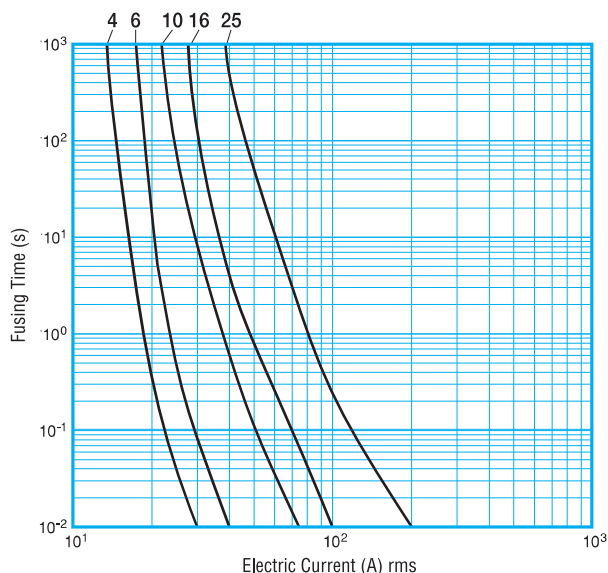


500SF/500SFK

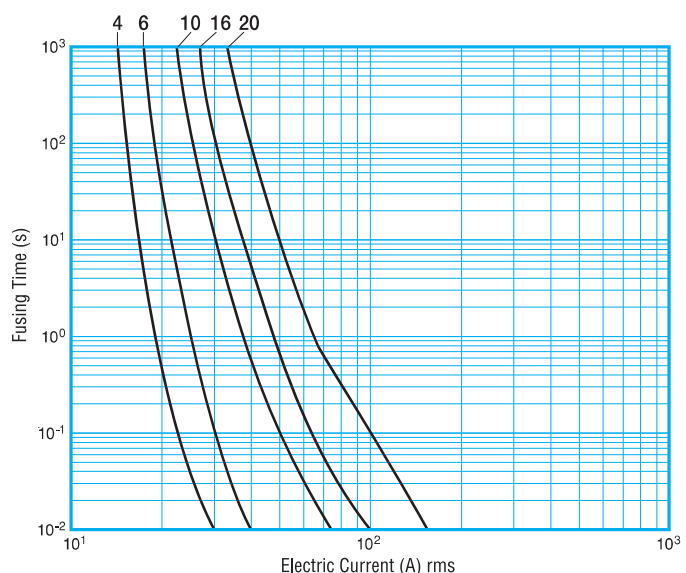


Temperature Rise 250SF/500SF

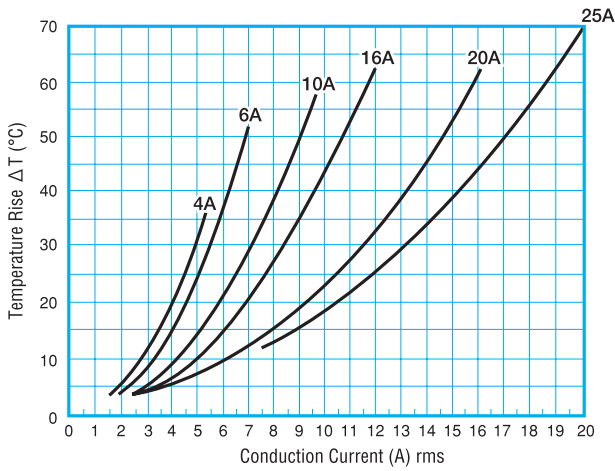


250SFK/500SFK

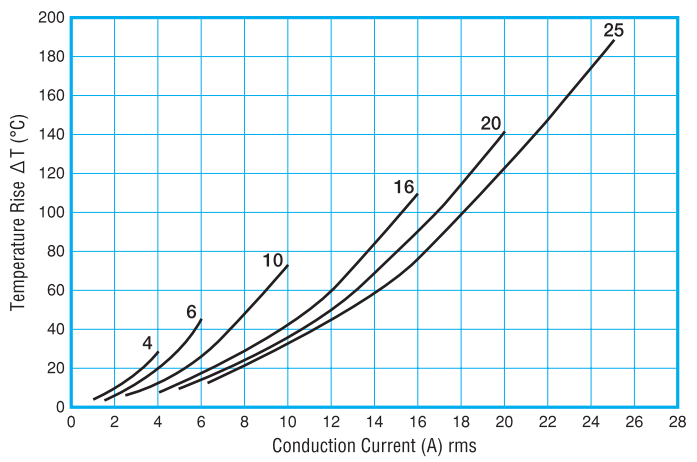


Power Loss 250SF/500SF

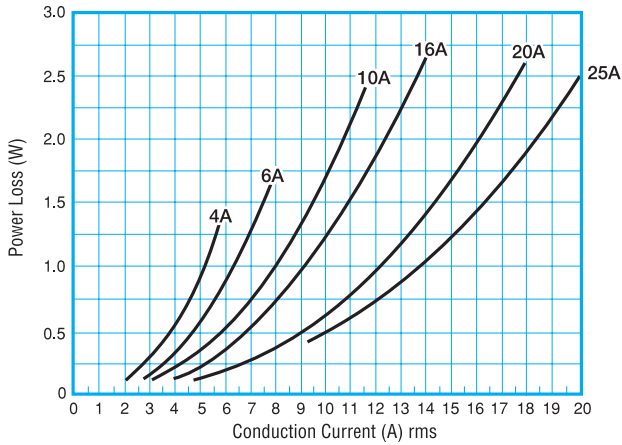


250SFK/500SFK

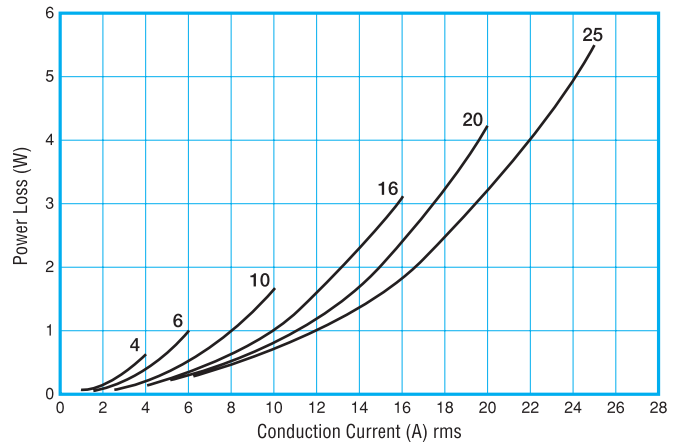


Shutdown I²t Against Working AC Voltage

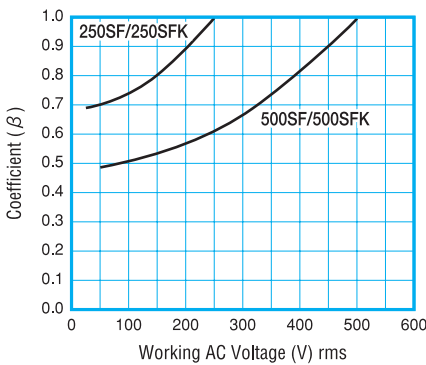

Current-Limiting Characteristics

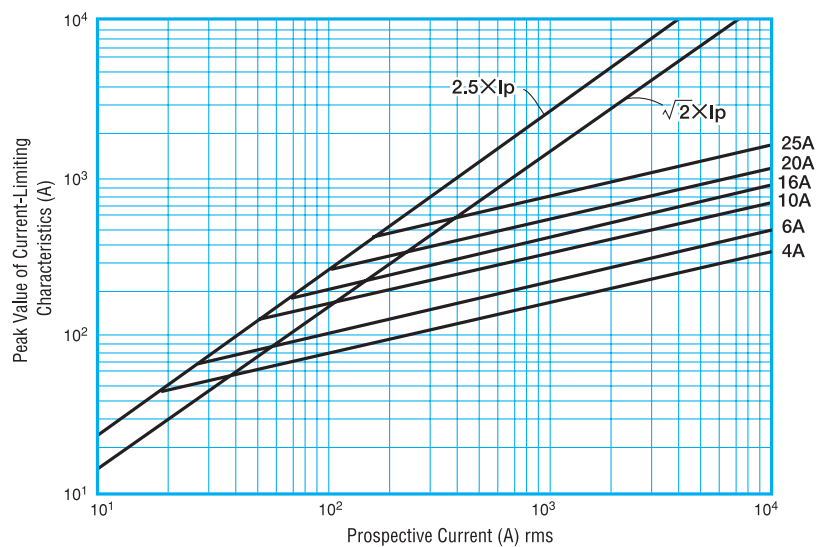

Application to Direct-Current Circuit

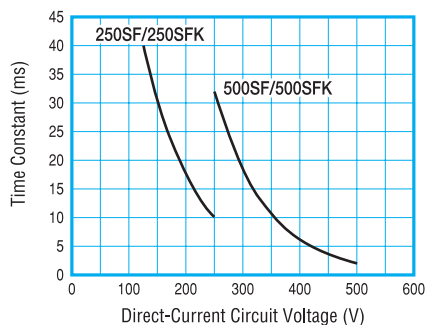

Power Loss and Temperature Characteristics

• Testing Conditions for Board-Soldered-Type Fuses

The power loss and the temperature characteristics are studied using an FR-4 board (one-side board) and a 35- μ m-thick copper foil with a copper foil width of 0.5 mm/A depending on the rated amperage (e.g., 5 mm width for a product rated at 10A).